POURTHANE

(SL) Self-Leveling Joint Sealant


- One-component, no mixing
- Self-leveling
- Movement capacity of +/-25%
- Accelerated curing
- Jet fuel resistant
- Permanently elastic
- High durability
- Resists aging and weathering
- Excellent adhesion
- Convenient, easy-to-use packaging





(NS) Non-Sag Joint Sealant

- Ready to use and easy to gun and tool/No mixing and speeds application
- Low VOC content, approved in all 50 states
- +/- 35% joint movement capability
- No primer required for most construction materials
- Maintains excellent weather resistance
- Can be used in all climates.
- Packaged in cartridges, sausages, and in bulk
- Superior bonding

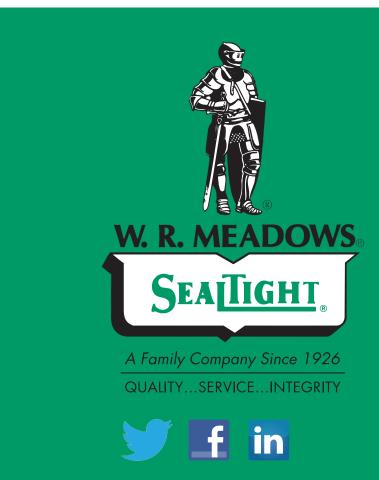

SL Packaging

- 20 Oz. (592 mL) Sausages
- 29 Oz. (825 mL) Cartridges
- 5 Gal. (18.93 L) Pails
- 617 Lb, (280 Kg) Drums

NS Packaging

- 10.1 Oz. (300 mL) Cartridges
- 20 Oz. (592 mL) Sausages
- 5 Gal. (18.9 L) Pails
- 617 Lb, (280 Kg) Drums

Colors

- Limestone
- Stone Gray
- Tan

Colors

- Limestone
- Stone Gray
- Tan
- White
- Black
- Bronze



For more information, samples or literature, visit www.wrmeadows.com or call 1-800-342-5976